



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

10/506913

PCT/EP 03/01945

10 Rec'd PCT

05 SEP 2004

REC'D 17 APR 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02388019.8

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02388019.8
Demande no:

Anmeldetag:
Date of filing: 07.03.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Telefonaktiebolaget L M Ericsson (Publ)

126 25 Stockholm
SUEDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Soft value calculation for multilevel signals

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L27/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Soft value calculation for multilevel signals

This invention relates to digital communications systems and, more particularly, the generation of soft reliability values for multilevel signals.

5

Within the field of digital communications, multilevel modulation is used to map a number of bit sequences to a signal alphabet comprising a number of signal symbols, i.e. a number of points in signal space. For example, a bit sequence may be mapped onto a point in a complex signal space. A signal
10 alphabet of size M allows $\log_2(M)$ bits to be mapped to each symbol. However, when symbols are received at a receiver, they may be affected by noise, thereby affecting the decoding of the signal when retrieving the transmitted bit sequence. If multilevel modulation is used in conjunction with channel coding, many channel decoders, such as iterative decoders based
15 on the BCJR algorithm, require so-called soft bit values as an input. A soft bit value corresponds to a reliability value of a single bit being 0 or 1.

20

Examples of multilevel modulation include multi-amplitude level modulation in Pulse Amplitude Modulation (PAM), multi phase level modulation in Phase Shift Keying (PSK), multi signal point modulation in Quadrature Amplitude Modulation (QAM).

25

For example, an emerging technology for wideband digital radio communications of Internet, multimedia, video and other capacity-demanding applications in connection with the third generation of mobile telephone systems is the evolving Wideband Code Division Multiple Access (WCDMA) specified as part of the 3GPP standardisation organisation. Within this technology, High Speed Downlink Packet Access (HSDPA) is provided including a high speed downlink shared channel (HS-DSCH) which uses
30 16QAM. In 16QAM for example, $M=16$, i.e. each symbol in the signal alphabet represents 4 bits. Future releases may comprise even larger constellation sizes such as 64 QAM.

35

It is known how to convert signal symbols to soft bit values by calculating all distances in signal space between the received symbol and all signal points of the signal alphabet. In particular, in order to obtain optimal performance, a

likelihood ratio is calculated depending on corresponding sums of probabilities where the probabilities are functions of the calculated distances. It is further known that in the calculation of a likelihood ratio the sums of probabilities may be approximated by the dominant contributions to the sums of probabilities in the likelihood ratio (A.J. Viterbi, "An intuitive justification and a simplified implementation of the MAP decoder for conventional codes", IEEE Journal on selected areas in communications, 16(2), February 1998).

Even though this approximation significantly reduces the computational complexity while only causing a negligible loss in performance, it is a problem of the above prior art method that it still requires a calculation of all distances to all the signal points in order to determine which two are actually needed for the calculation of the likelihood ratio. For example, in a 16QAM modulation, 16 distances have to be calculated for each received symbol. In particular, if a high rate of symbols need to be decoded, e.g. several hundred symbols per millisecond, the above problem is particularly severe.

The above and other problems are solved when a method of generating a reliability value for a received multilevel signal in relation to a number of predetermined signal symbols each associated with a corresponding bit sequence including a first bit position; the reliability value being indicative of likelihood information of receiving said multilevel signal is characterized in that the method comprises the steps of

- identifying a first one of the number of signal symbols as being closest to the received multilevel signal; and
- estimating the reliability value based on stored information related to a second one of the number of signal symbols being closest to the first signal symbol and corresponding to a different binary value at the first bit position of the respective associated bit sequence than the first signal symbol.

Consequently, according to the invention, the closest signal point needed for calculating the likelihood ratio is determined first, such that only the corresponding distances to the identified signal points need to be determined. In this way, the computational complexity is reduced significantly, since not more than two distances need to be calculated in

order to determine the likelihood ratio for each bit. Hence, the above method is particularly well-suited for low-complexity implementations in mobile receivers, as it reduces the required computational resources.

- 5 According to a preferred embodiment of the invention, the stored information comprises an identification of the second signal symbol, and the step of estimating the reliability value further comprises the steps of
- determining a first distance between the received signal and the first signal symbol; and
 - 10 - determining a second distance between the received signal and the second signal symbol.

Hence, given a signal constellation, as for each signal symbol and for each bit position it is known which one of the other signal symbols having an opposite value at that bit position is closest to that signal symbol, this
15 information may be stored. Therefore, by a simple look-up operation the closest signal symbol may be identified and the distance between the received signal and the closest signal symbol may be calculated.

- 20 According to another preferred embodiment of the invention, the stored information comprises a second distance between the first signal symbol and the second signal symbol, and the step of estimating the reliability value further comprises the step of determining a first distance between the received signal and the first signal symbol. Hence, alternatively or
25 additionally to storing an identification of the signal symbol with opposite bit value at a given bit position being closest to the first signal symbol, the actual distance between the first and the second symbol may be pre-calculated and stored. Once the first signal symbol is identified, this distance may be looked up and used as an approximation for the distance between the received
30 signal and the second signal symbol. Consequently, a further reduction in computational complexity is achieved, since only one distance has to be calculated.

- 35 When the step of estimating the reliability value comprises the step of determining a polynomial function of the first distance and the second distance, multiplied by a predetermined constant, the computational

complexity is further reduced, as no logarithm needs to be calculated. In one embodiment, the polynomial function is a difference of the squared distances.

5 According to yet another preferred embodiment of the invention, the stored information is indicative of a number of functional relations between the received multilevel signal and the reliability value, and the step of estimating the reliability value further comprises the step of selecting a functional relation of said number of functional relations dependant on the first signal symbol and the first bit position. Hence, the calculation of the likelihood value
10 only comprises the step of calculating the corresponding stored function. Preferably, the functional relationship is a linear function of a signal component, thereby reducing the calculation to a multiplication operation and an adding operation.

15 According to yet another preferred embodiment, the stored information comprises, for each signal symbol and bit position an approximation of the corresponding reliability value. Hence, according to this embodiment, an approximation of the reliability value may be directly looked up once the closest signal symbol is identified, thereby providing a computationally very
20 efficient method which eliminates the need of online distance calculations.

Preferably, the stored information is stored in a look-up table indexed by the number of signal symbols and the bit positions of the number of bit sequences, thereby providing fast access to the information.

25 In one embodiment of the invention, the method further comprises the step of providing the reliability value as an input to a decoder, e.g. an iterative decoder using the BCJR algorithm or any other decoder using soft values as an input. It is an advantage of the invention that it provides an accurate and
30 resource-efficient approximation of soft values as an input to such decoders.

The first signal symbol may be identified by comparing the signal components with predetermined thresholds or decision boundaries, for instance by means of a slicer, i.e. a circuit which compares a signal with
35 predetermined thresholds. Hence, a fast and computationally inexpensive method is provided for identifying the closest signal symbol without the

necessity of calculating all distances between the received value and all signal symbols.

5 It is a further advantage of the invention that cost-effective, standard components may be employed when implementing a method according to the invention.

10 When the likelihood information comprises a log-likelihood ratio, a high performance quality is achieved, as the use of a log-likelihood corresponds a theoretically optimal way of calculating soft reliability values. However, other methods of calculating likelihood information may be employed, such as a log-likelihood of the signal power.

15 In a preferred embodiment of the invention the step of identifying the first signal symbol as being closest to the received multilevel signal comprises the step of identifying the first signal symbol as being closest to the received multilevel signal with respect to a Euclidean distance measure in a signal space, as the Euclidean distance is directly related to the probabilities of a likelihood calculation. Alternatively, other suitable known metrics may be
20 used instead Euclidean distances.

The signal space may be a real or complex signal space. For example, in QAM modulation two amplitude-modulated signals are transmitted on a single carrier, but shifted in phase by 90 degrees. Hence, the resulting signal
25 points may be represented in the complex plane representing the so-called in-phase (I) and quadrature (Q) components of the QAM signal.

30 When the number of signal symbols are associated with the number of bit sequences such that the bit sequences associated with all nearest neighbours of each signal symbol only differ from the bit sequence of that signal symbol at one bit position, the error rate of the transmission system is reduced. This form of mapping is referred to as Gray mapping.

35 The invention further relates to an arrangement for generating a reliability value for a received multilevel signal in relation to a number of predetermined signal symbols each associated with a corresponding bit sequence including

a first bit position; the reliability value being indicative of likelihood information of receiving said multilevel signal; characterised in that the arrangement comprises

- 5 - first processing means adapted to identify a first one of the number of signal symbols as being closest to the received multilevel signal;
- storage means adapted to store information related to the first signal symbol and a second one of the number of signal symbols being closest to the first signal symbol and corresponding to a different binary value at the first bit position of the respective associated bit sequence than the first
- 10 signal symbol; and
- second processing means adapted to estimate the reliability value on the basis of the stored information.

15 The arrangement may be implemented by any processing unit, e.g. a programmable microprocessor, an application-specific integrated circuit, or another integrated circuit, a smart card, or the like. The term processing means comprises general- or special-purpose programmable microprocessors, Digital Signal Processors (DSP), Application Specific Integrated Circuits (ASIC), Programmable Logic Arrays (PLA), Field

20 Programmable Gate Arrays (FPGA), etc., or a combination thereof. The processing means may be a CPU of a computer, a microprocessor, a smart card, a SIM card, or the like. The first and second processing means may be separate processing means, e.g. separate circuits, or they may be combined in one processing means, e.g. performed by suitable instructions executed by

25 a programmable microprocessor.

 The term storage means includes magnetic tape, optical disc, digital video disk (DVD), compact disc (CD or CD-ROM), mini-disc, hard disk, floppy disk, ferro-electric memory, electrically erasable programmable read only memory (EEPROM), flash memory, EPROM, read only memory (ROM), static random

30 access memory (SRAM), dynamic random access memory (DRAM), synchronous dynamic random access memory (SDRAM), ferromagnetic memory, optical storage, charge coupled devices, smart cards, etc.

Furthermore, the above discussed features and steps of the method according to the invention may be incorporated in the above arrangement according to the invention.

- 5 The invention further relates to a device for receiving multilevel signals comprising an arrangement as described above and in the following.

10 The device may be any electronic equipment or part of such electronic equipment, where the term electronic equipment includes computers, such as stationary and portable PCs, stationary and portable radio communications equipment. The term portable radio communications equipment includes mobile radio terminals such as mobile telephones, pagers, communicators, e.g. electronic organisers, smart phones, PDAs, or the like.

15

The invention will be explained more fully below in connection with preferred embodiments and with reference to the drawings, in which:

20 figs. 1a-b schematically show a receiver according to an embodiment of the invention;

fig. 2 shows an example of a signal constellation with 16 signal symbols;

25 fig. 3 shows a flow diagram of a method according to a first embodiment of the invention;

fig. 4 shows an example of a look-up table according to the embodiment of fig. 3;

30 fig. 5 shows a flow diagram of a method according to a second embodiment of the invention;

fig. 6 shows an example of a look-up table according to the embodiment of fig. 5;

35

fig. 7 shows another example of a signal constellation with 16 signal symbols;

fig. 8 shows a flow diagram of a method according to a third embodiment of the invention; and

fig. 9 shows an example of a look-up table according to the embodiment of fig. 8.

10 Fig. 1a schematically shows a receiver according to an embodiment of the invention receiving a radio signal from a transmitter via a communications channel. Transmitter 101 is adapted to send a signal s via a noisy channel 102 to receiver 103. The signal s represents one of a set of M signal points $S_1 \dots S_M$ in a signal space where each signal point is related to a respective bit sequence of $\log_2(M)$ bits. In the presence of noise in the transmission
15 channel 102, the receiver 103 receives a signal r' which deviates from the transmitted signal s . In one embodiment the signal is a Code Division Multiple Access (CDMA) signal using a spread spectrum technique. The receiver 103 comprises a receiver circuit 107 for transforming the received spread spectrum signal into the signal symbol r . The receiver further
20 comprises a channel decoder 106 for decoding the received signal symbol r , e.g. a BCJR or Viterbi decoder. The decoder 106 requires soft bit values as an input. Hence, the receiver 103 further comprises a circuit 104 which is adapted to calculate soft values for the $\log_2(M)$ bits of the received signal symbol r and to provide the calculated soft values to the decoder 106.
25 According to the invention, the receiver 103 further comprises a memory 105, such as on-chip memory, EPROM, flash memory, or the like, in which a look-up table is stored for use in an efficient calculation of the soft values by the circuit 104, preferably as described in connection with figs. 3-9.

30 Fig. 1b schematically shows a more detailed block diagram of the receiver circuit 103 of fig. The circuit 107 comprises a RAKE receiver 110 suitable for receiving CDMA signals, i.e. a receiver which uses several baseband correlators to individually process several signal multipath components. The correlator outputs are combined to achieve improved communications
35 reliability and performance (see e.g. "Digital Communications" 4th Edition, by

John G. Proakis, McGraw-Hill, 2000). The sampled received radio signal r' is fed to the RAKE receiver 110 which generates the signal symbol r to be decoded. The circuit 107 further comprises a channel estimator 111 and a noise estimator 112, e.g. implementing any suitable channel estimation and noise estimation technique known in the art. The channel estimator receives the received radio signal r' , identifies up to N different radio paths or channel taps and estimates corresponding delays Δ_k , $k=1, \dots, N$, and complex channel estimate $\mathbf{h}_r = (h_{r1}, \dots, h_{rN})$ of these paths. The channel estimator 111 further provides a set of complex combiner weights $\mathbf{w} = [w_1 \ w_2 \ \dots \ w_N]^T$ to be used by the rake receiver. Here, $[\]^T$ denotes a transposed vector. For example, the weights may be determined according to an optimisation criterion, such as maximising the received signal energy.

The calculated delays Δ_k and the combiner weights are provided to the rake receiver 110. The RAKE receiver 110 comprises delay circuits 115 which delay the incoming signal according to the N channel taps. Further, the receiver 110 comprises circuitry 116 for multiplying the N delayed versions of the received signal with a spreading code c for despreading the spread spectrum signals and circuitry 117 for summing the signals to form a radio symbol. Furthermore, the rake receiver 110 comprises multiplier circuitry 118 for multiplying each of the N radio symbols with the combiner weights $(w_k)^*$, $k=1, \dots, N$, where $(\)^*$ denotes complex conjugation. Finally, the RAKE receiver 110 comprises an adding circuit 119 which combines the weighted symbols to form the received symbol estimate r which is fed to the soft value calculation circuit 104.

When using a multilevel constellation of signal points $S_1 \dots S_M$ the amplitude information should be maintained in order to ensure successful demodulation in the receiver. Consequently, the reference points $S_1 \dots S_M$ should be scaled properly. In the following it is assumed that the channel estimator 111 estimates the channel gain on the basis of a reference channel \mathbf{h}_r which has a channel gain that may be different from the actual gain of the traffic channel, e.g. a HS-DSCH. The gain difference between the reference channel and the traffic channel may be denoted with g . Hence, the received symbol r after the RAKE receiver 110 may be expressed as

$$r = g w^H h_r s + n,$$

where w^H is the Hermitian conjugate of w , $w^H h_r$ denotes an inner product, s is the transmitted symbol and n is a noise term, e.g. representing additive white Gaussian noise (AWGN). The gain parameter g is signalled to the receiver, w is selected by the combiner in the receiver, and h_r are the channel estimates. Hence, at the receiver, the reference signal symbols $S_1 \dots S_M$ may be scaled appropriately, according to

$$\hat{S}_j = g w^H h_r S_j, \quad j = 1, \dots, M. \quad (0)$$

In fig. 1b, the receiver circuit 107 comprises circuit 113 adapted to calculate the above scaling factor $g w^H h_r$, and a multiplier circuit 114 for multiplying the reference symbols with the scaling factor, resulting in properly scaled signal symbols $\hat{S}_1, \dots, \hat{S}_M$, which are fed into the soft value calculation circuit 104.

Finally, the noise estimator 112 provides an estimate of the signal noise level σ which is fed into the soft value calculation circuit 104.

According to the invention, the soft value calculation circuit locates the signal symbol which is closest to the received signal r and calculates corresponding soft values L_m for bit m , $m=1, \dots, \log_2(M)$, e.g. according to one of the embodiments discussed in connection with figures 3-9.

It is noted that the receiver circuit described in connection with figs. 1a-b merely serves as an example, and the scope of the invention is not limited to the type of receiver, nor to the above scaling of signal symbols.

Fig. 2 shows a signal constellation with 16 signal symbols. The signal constellation comprises $M=16$ signal points S_1 through S_{16} in a two-dimensional signal space, e.g. the I/Q components in a 16QAM signal constellation. Preferably, the signal points are distributed regularly, such that the distance to the nearest neighbours of each signal point is the same. The reference points may take values that suit the implementation in question. However, alternatively, other signal constellations may be chosen. In fig. 2, 16 different bit sequences 0000 through 1111, each consisting of $\log_2(M)=4$

bits, are mapped onto the signal points S_1 - S_{16} . Preferably, the mapping of the bit sequences to the signal points is chosen such that the bit sequence of each signal point only differs from those of the nearest neighbours by one bit, thereby optimising the decoding performance. For example, in fig. 2, signal point S_8 has three nearest neighbours, S_4 , S_7 , and S_{12} . The bit sequence of S_4 , i.e. 1111, differs from the sequence 1110 of S_8 only at bit position 4, etc. Alternatively, other mappings may be chosen.

For every bit position m mapped on a signal point, the signal points in the constellation may be divided into two sets where the signal points in each set have bit value 0 and 1, respectively, at that position. In the following, the set of signal points with a 0 at the m -th position is denoted $A_{0,m}$, and the corresponding set with a 1 at the m -th position is denoted $A_{1,m}$. For example, in the example of fig. 2 and for $m=1$, $A_{1,1}=\{S_3, S_4, S_7, S_8, S_{11}, S_{12}, S_{15}, S_{16}\}$ and $A_{0,1}=\{S_1, S_2, S_5, S_6, S_9, S_{10}, S_{13}, S_{14}\}$. The sets are of equal size with $M/2$ elements each.

When one of the signals S_1, \dots, S_{16} is transmitted over a noisy channel, the received signal will differ from the transmitted signal according to a corresponding distribution. The actual shape and width of the distribution of received signals depends on the characteristics of the noise. In fig. 2, the cross 201 represents an example of a received signal r .

Prior to providing the received 16QAM radio symbols to a decoder, e.g. a turbo decoder, they are converted into soft values. Hence, a soft value is calculated for each bit of every 16QAM symbol. A soft value of the m -th bit in the sequence mapped to r may be defined as

$$L_m = \log \frac{P(s_m = 1|r)}{P(s_m = 0|r)} = \log \frac{P(s_m = 1) P(r | s_m = 1)}{P(s_m = 0) P(r | s_m = 0)} = \log \frac{P(r | s_m = 1)}{P(r | s_m = 0)} \quad (1)$$

where s_m is the m -th bit in the bit sequence represented by the transmitted signal, and $P(s_m=i|r)$, $i=0,1$, are the a posteriori probabilities of the bit s_m where r is the received signal. It is noted that the second equality assumes that $s_m=1$ and $s_m=0$ are equally probable in the chosen alphabet. Otherwise, the overall ratio of probabilities should be taken into consideration in the

following. However, this would only give rise to a constant factor. Hence, L_m corresponds to a log-likelihood ratio of probabilities. The probabilities $P(r|s_m=i)$ in eqn. (1) may be written as

$$P(r | s_m = i) = \frac{2}{M} \sum_{s \in A_{i,m}} P(r, s), \quad i = 0, 1. \quad (2)$$

Hence, the calculation of the above probability involves a summation over $M/2$ terms each including a joint probability $P(r, s)$. This is a computationally expensive task, especially if M is large, e.g. $M=64$.

In many applications, the above soft values L_m may be approximated by

$$L_m = \log \frac{\max_{s \in A_{1,m}} P(r, s)}{\max_{s \in A_{0,m}} P(r, s)} = \log \frac{P(r | \hat{s}_{1,m})}{P(r | \hat{s}_{0,m})}, \quad (3)$$

where $\hat{s}_{i,m}$, $i=0, 1$, are the signal points that result in the largest contribution to the sums in eqn. (2). Hence, in the calculation of the probabilities, the sums over $M/2$ terms are approximated by the their respective dominant terms, according to

$$\log \sum_{s \in A_{i,m}} P(r, s) \approx \log \max_{s \in A_{i,m}} P(r, s). \quad (4)$$

The above approximation is often referred to as the "max log MAP" approximation which yields a good approximation in cases where the above sums are dominated by one term, as for example in the case of Gaussian noise when the signal to noise ratio (SNR) is large. The above probabilities depend on the distances between the received signal r and the respective signal points. For example, in the case of additive zero-mean Gaussian noise with variance σ^2 , the log-likelihood ratio of eqn. (3) may be expanded as

$$L_m = \log \frac{\sigma^{-2} \exp\left(-|r - \hat{s}_{1,m}|^2 / \sigma^2\right)}{\sigma^{-2} \exp\left(-|r - \hat{s}_{0,m}|^2 / \sigma^2\right)} = \sigma^{-2} \left(|r - \hat{s}_{0,m}|^2 - |r - \hat{s}_{1,m}|^2 \right). \quad (5)$$

It is noted that it is assumed that the $\hat{s}_{i,m}$ are scaled corresponding to the received signal according to equation (0) above. In the following, we define $d_{i,m} = |r - \hat{s}_{i,m}|$, for $i=0,1$, to be the distances between the received signal r and the closest signal points in the sets $A_{i,m}$, respectively. For example, in fig. 2, for $m=1$, $d_{0,1}$ corresponds to the distance δ_2 between r and the closest signal point in $A_{0,1}$, i.e. S_6 , while $d_{1,1}$ corresponds to the distance δ_1 between r and the closest signal point in $A_{1,1}$, i.e. S_8 . According to the invention, the likelihood ratio in equation (5) is obtained by first identifying the closest signal point S_8 , and then determining the distances δ_1 and δ_2 , as will be described in greater detail in connection with figs. 3-4. Hence, according to the invention, a computationally expensive calculation of all the distances between r and all the signal points $S_1 \dots S_{16}$ in order to identify the shortest distances δ_1 and δ_2 is avoided. Alternatively to identifying S_6 by means of a look-up table and then calculating δ_2 , the distance δ_3 between S_6 and S_8 may be looked up and used as an approximation instead of δ_2 , thereby saving additional computational resources. This will be described in greater detail in connection with figs. 5-6. A further embodiment of the invention will be described in connection with figs. 8-9.

It is noted that, preferably, in the above estimation of the reliability values, a proper scaling of the signal points in the QAM constellation is taken into consideration. If this scaling is taken into consideration, the above log-likelihood ratio may be written as

$$L_m = \sigma^{-2} \cdot \left(|r - \hat{s}_{0,m}|^2 - |r - \hat{s}_{1,m}|^2 \right). \quad (6)$$

As described in connection with fig. 1b, when using a multilevel constellation as in the example of fig. 2, the amplitude information should be maintained in order to ensure successful demodulation in the receiver. Consequently, the reference points S_j , $j=1, \dots, 16$ should be scaled properly. If this scaling is taken into consideration, the above log-likelihood ratio may be written as

$$L_m = K \cdot \left(|\tilde{r} - \tilde{s}_{0,m}|^2 - |\tilde{r} - \tilde{s}_{1,m}|^2 \right), \quad (7)$$

i.e. with the properly scaled signals

$$\begin{aligned} \tilde{r} &= \frac{r}{g w^H h_r} \\ \tilde{s}_{i,m} &= \frac{\hat{s}_{i,m}}{g w^H h_r} \quad m = 1, \dots, \log_2(M), i = 0, 1, \end{aligned} \quad (8)$$

5 and where

$$K = (g w^H h_r)^2 / \sigma^2 \quad (9)$$

is a constant which depends on the signal to noise ratio.

10

Fig. 3 shows a flow diagram of a method according to a first embodiment of the invention. According to this embodiment, the soft values L_m are calculated using the approximation in equation (7). Initially, in step 301, a signal r is received and, in step 302, the signal point \check{s} from the set of signal points $S_1 \dots S_M$ which, according to a Euclidean metric, is closest to r is identified. For example, an efficient way of identifying \check{s} is by means of a slicer. In step 303, the distance δ_1 between r and \check{s} is calculated. Subsequently, for bit positions $m=1, \dots, \log_2(M)$, the following steps are performed: In step 304, the signal point \hat{s} which is closest to \check{s} is looked up in a look-up table 308. This signal point corresponds to the signal point which is closest to r and has the opposite bit value at position m than \check{s} . In step 305, the distance δ_2 between r and \hat{s} is calculated. Based on the distances δ_1 and δ_2 , the soft value L_m is now approximated according to eqn. (7) above: If the bit value \hat{s}_m of \hat{s} at position m is 0, the soft value is approximated by $L_m = K \cdot (\delta_2)^2 - (\delta_1)^2$ (step 306). Otherwise the soft value is approximated by $L_m = K \cdot (\delta_1)^2 - (\delta_2)^2$ (step 307). Here, K is a constant which depends on the noise distribution as described above. Referring to the example illustrated in fig. 2, the closest signal point to the received signal r (marked by the cross 201) is $\check{s} = S_8$. When calculating a soft value L_1 for the first bit position $m=1$ using the method of fig. 3, the first bit in S_8 is identified to be $\check{s}_1 = 1$. From a pre-computed look-up table, e.g. as illustrated in fig. 4, the closest signal point with a "0" in the first bit position is $\hat{s} = S_6$. Hence, the distances δ_1 and δ_2 may be calculated as $\delta_1 = |r - S_8|$ and $\delta_2 = |r - S_6|$, respectively, where $|\cdot|$ denotes the Euclidean distance. Thus, the soft value L_1 is approximated by $L_1 = K \cdot (\delta_2)^2 - (\delta_1)^2$.

15

20

25

30

35

Consequently, the method according to this embodiment requires at the most $1 + \log_2(M)$ distance calculations, since the closest distance δ_1 has to be calculated once for a received signal (step 303) and, for each bit position m , the distance δ_2 is calculated in step 305. This is to be compared with M distance calculations when all distances to all signal points are calculated. Hence, the computational complexity of this method only grows logarithmically with the size of the symbol alphabet rather than proportional to the alphabet size. This is a considerable reduction of the computational complexity, in particular for large alphabet sizes.

Fig. 4 shows an example of a look-up table according to the embodiment of fig. 3. The look-up table 308 identifies the pre-computed closest signal points and is indexed by the bit numbers m and the signal points $S_1 \dots S_M$. Each row corresponds to one of the signal points $S_1 \dots S_M$. For example, row 402 corresponds to signal point S_2 , such that each element in row 402 identifies a signal point which is the closest to S_2 among all signal points having a bit value opposite to S_2 at bit position m . Each entry in table 308 consumes $\log_2(M)$ bits for identifying one out of M signal points. Furthermore, the table consists of M rows and $\log_2(M)$ columns. Consequently, the table requires $M \cdot [\log_2(M)]^2$ bits. For example for $M=8$ the memory consumption is 72 bits and for $M=16$ the memory consumption is 256 bits. Hence, it is a further advantage of this embodiment that it only requires little storage space for storing the look-up table. It is a further advantage of this embodiment, that it yields a good approximation of the soft values, thereby providing a good decoding performance.

Fig. 5 shows a flow diagram of a method according to a second embodiment of the invention. Again, this embodiment utilises the approximation of equation (7) for the calculation of the soft values L_m . As in the embodiment of fig. 3, in the initial step 501, a signal r is received and, in step 502, the signal point \check{s} from the set of signal points $S_1 \dots S_M$, which is closest to r is identified, e.g. by means of a slicer. In step 503, the distance δ_1 between r and \check{s} is calculated. Subsequently, for bit positions $m=1, \dots, \log_2(M)$, the following steps are performed: In step 504, the distance δ_3 between \check{s} and the signal point \hat{s} which is closest to \check{s} and has the opposite bit value at position m is looked up in a look-up table 508. Subsequently, this distance δ_3 is used as an

approximation for the distance δ_2 between r and \hat{s} when approximating the soft value L_m according to eqn. (7) above. Hence, if the bit value \hat{s}_m of \hat{s} at position m is 0, the soft value is approximated by $L_m = K \cdot (\delta_3)^2 - (\delta_1)^2$ (step 506). Otherwise the soft value is approximated by $L_m = K \cdot (\delta_1)^2 - (\delta_3)^2$ (step 507). Again, K is a constant which depends on the noise distribution. Referring again to the example illustrated in fig. 2, the closest signal point to the received signal r is $\hat{s} = S_8$. When calculating a soft value L_1 for the first bit position $m=1$ using the method of fig. 5, the first bit in S_8 is identified to be $\hat{s}_1 = 1$. From a pre-computed look-up table, e.g. as illustrated in fig. 6, the distance to the closest signal point with a "0" in the first bit position is $d_{1,8} = \delta_3$. Hence, the distance δ_1 is calculated as $\delta_1 = |r - S_8|$ and δ_2 is approximated by δ_3 . Thus, the soft value L_1 is approximated by $L_1 = K \cdot (\delta_3)^2 - (\delta_1)^2$.

Consequently, as the pre-computed distance δ_3 is used as an approximation for δ_2 , the method according to this embodiment requires only one distance calculation, i.e. the calculation of δ_1 (step 503). Again, this is to be compared with M distance calculations when all distances to all signal points are calculated.

Hence, it is an advantage of this embodiment that the computational complexity does not grow with the size of the symbol alphabet, thereby yielding a computationally efficient method of approximating soft values.

Fig. 6 shows an example of a look-up table according to the embodiment of fig. 5. The look-up table 508 comprises the pre-computed distances between the signal points in a constellation of size M . A distance $d_{m,k}$ in table 508 denotes the Euclidean distance between signal point S_k and the closest signal point with opposite bit value at position m . Assuming that each distance is stored with a resolution requiring η bits, each entry in the table 508 requires η bits. Furthermore, the table consists of M rows and $\log_2(M)$ columns. Consequently, the table requires $\eta \cdot M \cdot \log_2(M)$ bits. For example, for $M=8$ the memory consumption is 24η bits and for $M=16$ the memory consumption is 64η bits. Hence, it is a further advantage of this embodiment that it requires little storage capacity. In an embodiment where the resolution of the pre-computed distances is higher than $\log_2(M)$ bits, i.e. $\eta > \log_2(M)$,

processing time is traded for memory space in comparison with the embodiment of figs. 3-4.

5 It is noted that additional storage space may be saved by only storing each distance once, i.e. in case the same distance appears in two or more entries of the table, a reference to that distance may be stored in one of the entries, instead.

10 Alternatively, other layouts of a look-up table may be used. For example, in one embodiment, the look-up table may comprise all $M(M-1)/2$ mutual distances between the signal points S_k , thus requiring $\eta M(M-1)/2$ bits of storage. However, for $M > 4$ this embodiment requires larger storage capacity than the embodiment of fig. 6.

15 Fig. 7 shows another example of a signal constellation with 16 signal symbols. As in fig. 2, the signal constellation comprises $M=16$ signal points S_1 through S_{16} in a two-dimensional signal space, e.g. the I/Q components in a 16QAM signal constellation. The signal points are distributed regularly, such that the distance to the nearest neighbours of each signal point is the same. In the example of fig. 7, they are assumed to be selected such that

20

$$S_k = x_k + j \cdot y_k, \text{ where } x_k, y_k \in [-3d, -d, d, 3d], k=1, \dots, M,$$

where d is an arbitrary constant and where $j^2 = -1$. For example, d may be chosen to $d=1$. However, alternatively, other signal constellations may be chosen.

25

In fig. 7, 16 different bit sequences 0000 through 1111, each consisting of $\log_2(16)=4$ bits, are mapped onto the signal points S_1, \dots, S_{16} . Preferably, the mapping of the bit sequences to the signal points is chosen to be a Gray mapping, i.e. such that the bit sequence of each signal point only differs from those of the nearest neighbours by one bit, thereby optimising the decoding performance.

30

As above, for every bit position m mapped on a signal point, the signal points in the constellation may be divided into two sets $A_{0,m}$ and $A_{1,m}$, where the signal points in each set have bit value 0 and 1, respectively, at that position.

- 5 Fig. 8 shows a flow diagram of a method according to a third embodiment of the invention. Again, this embodiment utilises the approximation of equation (7) for the calculation of the soft values L_m . As in the embodiment of fig. 3, in the initial step 801, a signal r is received. The received signal may be written as $r = \text{Re}(r) + j \text{Im}(r)$ and, in the following the magnitude of the I- and Q components of r will be denoted by $a = |\text{Re}(r)|$ and $b = |\text{Im}(r)|$, respectively.
- 10 After the received symbol is combined in the combiner, in step 802, the signal point \hat{s} from the set of signal points $S_1 \dots S_M$, which is closest to r is identified. In this embodiment it is assumed that the constellation of signal points corresponds to the constellation of fig. 7. In fig. 7, each signal point
- 15 corresponds to a decision region where the decision regions are separated by a set of decision boundaries 701 through 706. Hence, the closest signal point \hat{s} may be found by performing two comparisons of the inphase component and the quadrature component, respectively. For example, if $\text{Re}(r) < 0$ (decision boundary 705) and $\text{Re}(r) < -2d$ (decision boundary 706)
- 20 and if $\text{Im}(r) > 0$ (decision boundary 702) and $\text{Im}(r) > 2d$ (decision boundary 701), the received signal lies in the decision region corresponding to S_1 , i.e. $\hat{s} = S_1$ is the closest signal point. Subsequently, for each bit positions $m=1, \dots, \log_2(16)=1, \dots, 4$, the soft value L_m may be calculated using the approximation of eqn. (7), assuming proper scaling. Consequently, in this
- 25 example the soft value L_1 for the first bit is

$$L_1(S_1) = K(|-a+j \cdot b - (d+3j \cdot d)|^2 - |-a+j \cdot b - (-3d+3j \cdot d)|^2) = K(8ad-8d^2),$$

- Hence, in the above equation, instead of computing two distances squared, each involving a calculation of the type $|x+jy|^2$, the soft value may be
- 30 calculated by scaling the inphase amplitude a of the received symbol with $8dK$ and, subsequently, by adding a constant $-8Kd^2$. It is further noted that the constant d may be chosen as any suitable positive real number.

- 35 The remaining three soft values for a received signal in the decision region corresponding to S_1 are accordingly

$$\begin{aligned}L_2(S_1) &= K(|-a+j \cdot b - (-3d+3j \cdot d)|^2 - |-a+j \cdot b - (-3d-j \cdot d)|^2) = K(-8bd+8d^2) \\L_3(S_1) &= K(|-a+j \cdot b - (-d+3j \cdot d)|^2 - |-a+j \cdot b - (-3d+3j \cdot d)|^2) = K(4ad-8d^2) \\L_4(S_1) &= K(|-a+j \cdot b - (-3d+3j \cdot d)|^2 - |-a+j \cdot b - (-3d+j \cdot d)|^2) = K(4bd-8d^2),\end{aligned}$$

- 5 as in the constellation of fig. 7 the closest symbols with opposite second, third, and fourth bit compared to S_1 are $S_9 = -3d - jd$, $S_2 = -d + 3jd$, and $S_5 = -3d + jd$, respectively.

10 The table 808 of fig. 9 illustrates the calculated soft values for all decision regions corresponding to the symbols S_1, \dots, S_{16} , and for all bits, $m=1, \dots, 4$. As can be seen from table 808, all soft values may be calculated by scaling one of the inphase component a or quadrature component b of the received signal r and subsequently adding a constant. Hence, using the pre-calculated equations of table 808, the soft values may be calculated in a very efficient
15 way. In one implementation, each entry of the look-up table 808 may comprise the scaling factor, the constant to be added and a bit indicating whether it is the inphase component a or the quadrature component b of the received signal r which is to be scaled for a given soft value. Preferably, the table is indexed by the decision region and the bit values. It is noted,
20 however, that many of the entries of table 808 are identical. Consequently, it will be apparent to a skilled person that table 808 may be stored in a memory efficient manner, e.g. by storing a list of the distinct entries and, in table 808, referring to the corresponding list members. In general, it is noted that constellations which are Gray coded or show another regularity, the
25 redundancy of the entries in table 808 may be utilised to reduce the memory consumption of table 808.

Referring again to fig. 8, in steps 804-805 the soft values for the identified decision region and for all bits are calculated. In step 804, the relation to be
30 calculated, i.e. the scaling factor and the constant to be added, are retrieved from a stored table 808 in memory, e.g. a look-up table as shown in fig. 9. The retrieved relation is calculated in step 805 resulting in the soft value for the corresponding bit number.

35 It is noted that the processing load in the receiver may further be decreased by pre-calculating the relations of table 808 and by storing the pre-calculated

soft values: Assuming that the inphase and the quadrature components of the received signal each are quantised to n bits, the soft values of table 808 may be precalculated and tabulated for every different inphase and quadrature value, thereby further decreasing the required calculations, as the scaling and adding of step 805 are not necessary in this embodiment. However, such a table of pre-calculated soft values increases the memory consumption. Above, $a=|\text{Re}(r)|$ and $b=|\text{Im}(r)|$ were defined as the absolute values of the real and imaginary parts of r , respectively, i.e. without sign information. Hence, a and b , each are represented by $n-1$ bits. If each of the pre-calculated soft values is to be represented by m bits, the total memory consumption of a full table is $m \cdot 2^{n-1} \cdot 4 \cdot 16$ bits (for each of the 16 decision regions and each of the 2^{n-1} different soft values are stored, each with a precision of m bits). For example, for $n=4$, the total memory is $512m$ bits. Note, however, that in this embodiment, the pre-calculated table still needs to be multiplied with the factor K .

It is noted, that the above memory consumption may be further reduced by utilising the fact that many of the entries of table 808 are identical and by utilising the symmetry of the constellation of fig. 7.

It is noted that the invention was described in connection with soft values defined as a log-likelihood ratio indicating a reliability value for the bit values of a received sequence. However, other definitions of soft values depending on the distance of the received signal to the signal points may be used as well.

It is further noted that the signal constellations of figs. 2 and 7 are merely used as examples. The calculation of soft values according to the invention is not limited to these signal constellations.

Finally, it is noted that the embodiments described in connection with figs. 3-6 are particularly well suited for large signal constellations, as they save memory, whereas the embodiment of figs. 8-9 is particularly well suited for implementing a medium-size signal constellation, e.g., 16QAM, as the save computational resources.

CLAIMS

1. A method of generating a reliability value ($L_{k,m}$) for a received multilevel signal (r) in relation to a number of predetermined signal symbols (S_1, \dots, S_M) each associated with a corresponding bit sequence including a first bit position (m); the reliability value being indicative of likelihood information of receiving said multilevel signal;
- 5
- characterised in that the method comprises the steps of
- identifying (302; 502; 802) a first one (\check{s}_k) of the number of signal symbols as being closest to the received multilevel signal; and
 - estimating (305, 306, 307; 506, 507; 804, 805) the reliability value based on stored information related to a second one (\hat{s}_k) of the number of signal symbols being closest to the first signal symbol and corresponding to a different binary value at the first bit position of the respective associated
 - 15 bit sequence than the first signal symbol.
2. A method according to claim 1, characterised in that the stored information comprises an identification of the second signal symbol, and the step of estimating the reliability value further comprises the steps of
- 20 - determining (303) a first distance (δ_1) between the received signal and the first signal symbol; and
 - determining (305) a second distance (δ_2) between the received signal and the second signal symbol.
- 25 3. A method according to claim 1, characterised in that the stored information comprises a second distance (δ_3) between the first signal symbol and the second signal symbol, and the step of estimating the reliability value further comprises the step of determining (503) a first distance (δ_1) between the received signal and the first signal symbol.
- 30 4. A method according to claim 2 or 3, characterised in that the step of estimating the reliability value comprises the step of determining (306, 307; 506, 507) a polynomial function of the first distance and the second distance, multiplied by a predetermined constant (K).

5. A method according to claim 4, characterised in that the predetermined constant is selected depending on the noise distribution of the received multilevel signal.

5 6. A method according to claim 1, characterised in that the stored information is indicative of a number of functional relations between the received multilevel signal and the reliability value, and the step of estimating the reliability value further comprises the step of selecting 804 a functional relation of said number of functional relations dependant on the first signal
10 symbol and the first bit position.

7. A method according to claim 1, characterised in that the stored information comprises for each signal symbol and bit position an approximation of the corresponding reliability value.

15 8. A method according to any one of the claims 1 through 7, characterised in that the stored information is stored in a look-up table (308; 508; 808) indexed by the number of signal symbols and the bit positions of the number of bit sequences.

20 9. A method according to any one of the claims 1 through 8, characterised in that the method further comprises the step of providing the reliability value as an input to a decoder (106).

25 10. A method according to any one of the claims 1 through 9, characterised in that the first signal symbol is identified by means of a slicer.

11. A method according to any one of the claims 1 through 10, characterised in that the likelihood information comprises a log-likelihood ratio.

30 12. A method according to any one of the claims 1 through 11, characterised in that the step of identifying the first signal symbol as being closest to the received multilevel signal comprises the step of identifying the first signal symbol as being closest to the received multilevel signal with respect to a
35 Euclidean distance measure in a signal space.

13. A method according to claim 12, characterised in that the signal space is related to the complex plane in quadrature amplitude modulation.

5 14. A method according to any one of the claims 1 through 13, characterised in that the number of signal symbols are associated with the number of bit sequences such that the bit sequences associated with all nearest neighbours of each signal symbol only differ from the bit sequence of that signal symbol at one bit position.

10 15. An arrangement for generating a reliability value ($L_{k,m}$) for a received multilevel signal (r) in relation to a number of predetermined signal symbols (S_1, \dots, S_M) each associated with a corresponding bit sequence including a first bit position (m); the reliability value being indicative of likelihood information of receiving said multilevel signal;

15 c h a r a c t e r i s e d i n that the arrangement comprises

- first processing means (104) adapted to identify a first one of the number of signal symbols as being closest to the received multilevel signal;
- storage means (105) adapted to store information related to the first signal symbol and a second one of the number of signal symbols being
20 closest to the first signal symbol and corresponding to a different binary value at the first bit position of the respective associated bit sequence than the first signal symbol; and
- second processing means (104) adapted to estimate the reliability value on the basis of the stored information.

25

16. An arrangement according to claim 15, characterised in that the storage means is adapted to store an identification of the second signal symbol, and the second processing means is further adapted to determine a first distance between the received signal and the first signal symbol and a second
30 distance between the received signal and the second signal symbol.

17. An arrangement according to claim 15, characterised in that the storage means is adapted to store a second distance between the first signal symbol and the second signal symbol, and the second processing means is further
35 adapted to determine a first distance between the received signal and the first signal symbol.

18. An arrangement according to claim 16 or 17, characterised in that the second processing means is further adapted to determine a polynomial function of the first distance and the second distance, multiplied by a predetermined constant.

5

19. An arrangement according to claim 18, characterised in that the predetermined constant is selected depending on the noise distribution of the received multilevel signal.

10 20. An arrangement according to claim 15, characterised in that the storage means is adapted to store information indicative of a number of functional relations between the received multilevel signal and the reliability value, and the second processing means is further adapted to select a functional relation of said number of functional relations dependant on the first signal symbol and the first bit position.

15

21. An arrangement according to claim 15, characterised in that the stored information comprises for each signal symbol and bit position an approximation of the corresponding reliability value.

20

22. An arrangement according to any one of the claims 15 through 21, characterised in that the storage means is adapted to store the stored information as a look-up table indexed by the number of signal symbols and the bit positions of the number of bit sequences.

25

23. An arrangement according to any one of the claims 15 through 22, characterised in that the first processing means further comprises a slicer.

30

24. An arrangement according to any one of the claims 15 through 23, characterised in that the likelihood information comprises a log-likelihood ratio.

35

25. An arrangement according to any one of the claims 15 through 24, characterised in that the first processing means is further adapted to identify the first signal symbol as being closest to the received multilevel signal with respect to a Euclidean distances in a signal space.

26. An arrangement according to claim 25, characterised in that the signal space is related to the complex plane in quadrature amplitude modulation.

5 27. An arrangement according to any one of the claims 15 through 26, characterised in that the number of signal symbols are associated with the number of bit sequences such that the bit sequences associated with all nearest neighbours of each signal symbol only differ from the bit sequence of that signal symbol at one bit position.

10

28. A device (103) for receiving multilevel signals comprising an arrangement according to any one of the claims 15 through 27.

15 29. A device according to claim 28, characterised in that the device further comprises a decoder (106) adapted to receive an input signal from the arrangement indicative of the determined reliability value.

30. A device according to claim 28 or 29, characterised in that the device is a mobile terminal.

Soft value calculation for multilevel signals

Abstract

5

Disclosed is a method of generating a reliability value for a received multilevel signal (r) in relation to a number of predetermined signal symbols (S_1, \dots, S_{16}) each associated with a corresponding bit sequence including a first bit position; the reliability value being indicative of likelihood information of receiving said multilevel signal. The method comprises the steps of identifying a first one (S_a) of the number of signal symbols as being closest to the multilevel signal; and estimating the reliability value based on stored information related to a second one (S_b) of the number of signal symbols being closest to the first signal symbol and corresponding to a different binary value at the first bit position of the respective associated bit sequence than the first signal symbol..

20 (Figure 2 should be published).

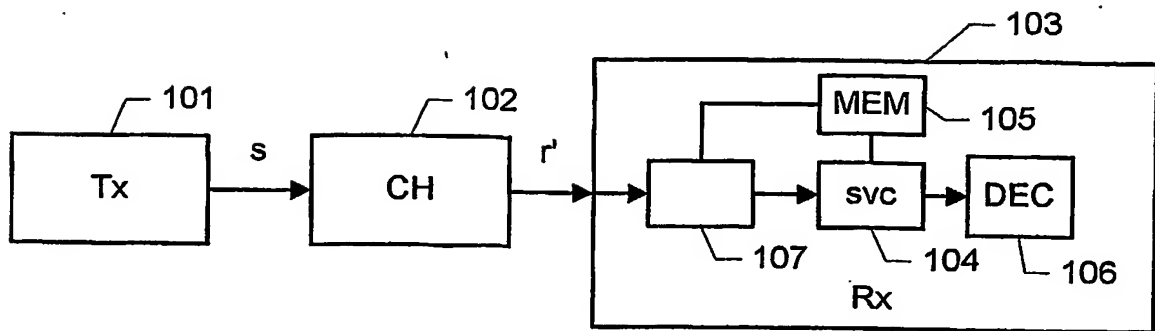


Fig. 1a

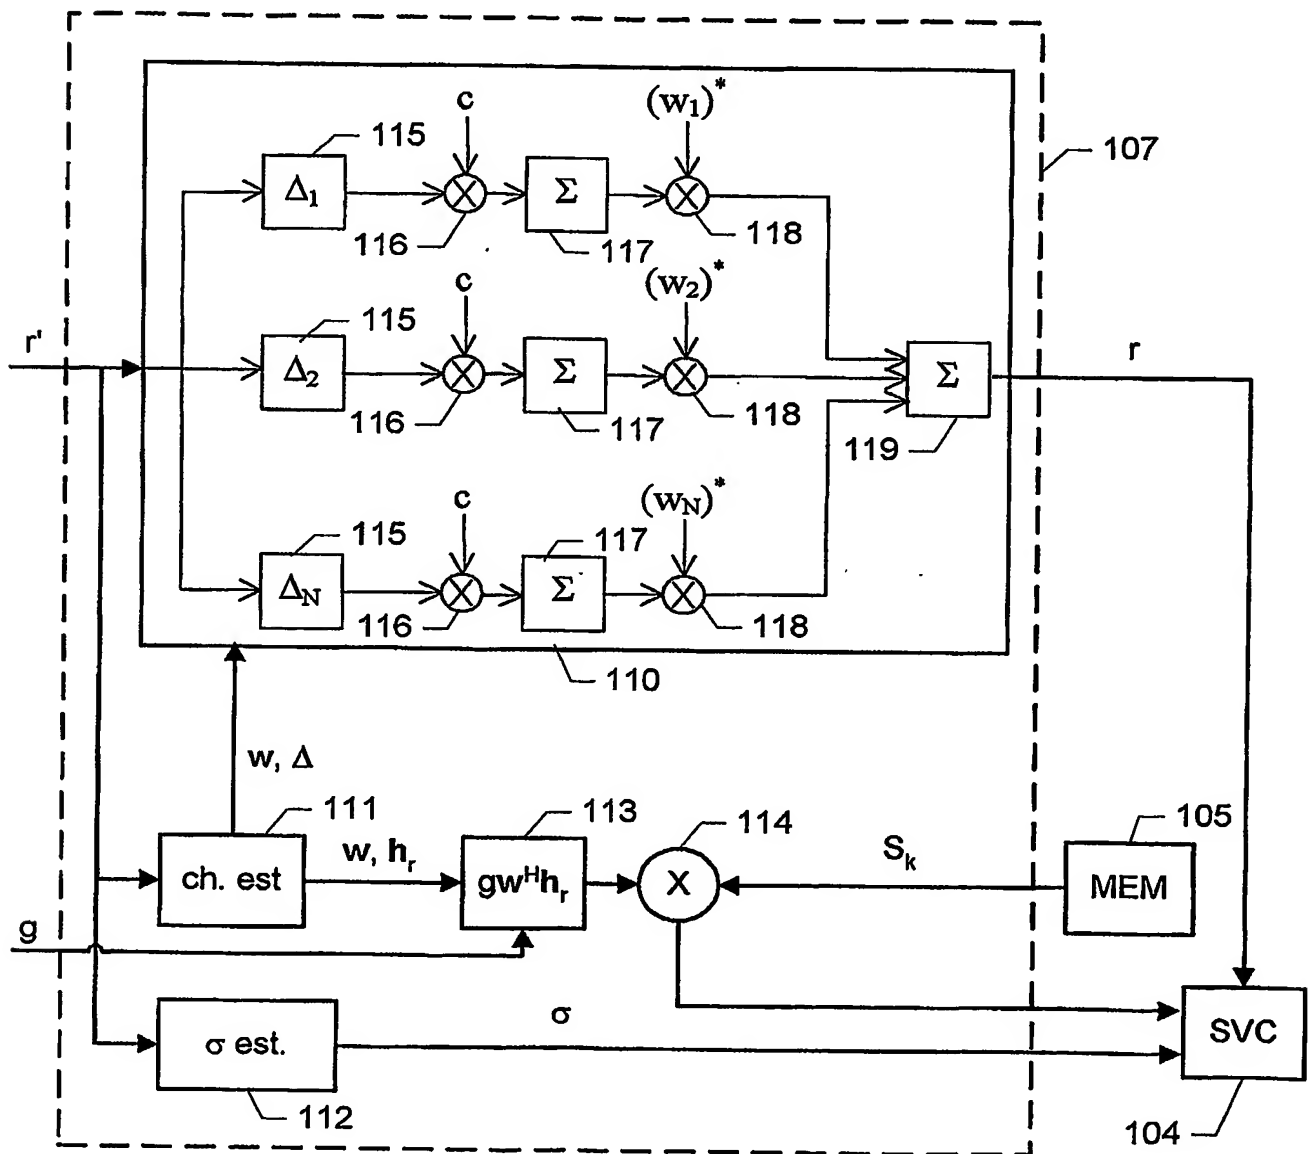


Fig. 1b

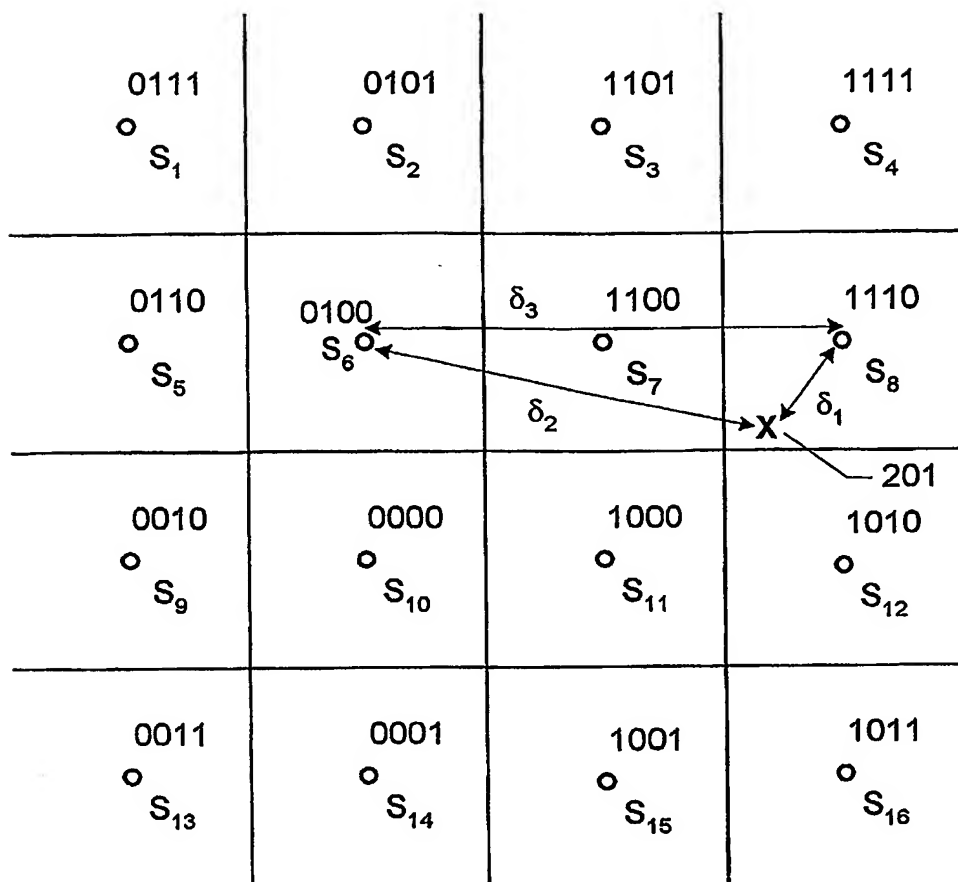


Fig. 2

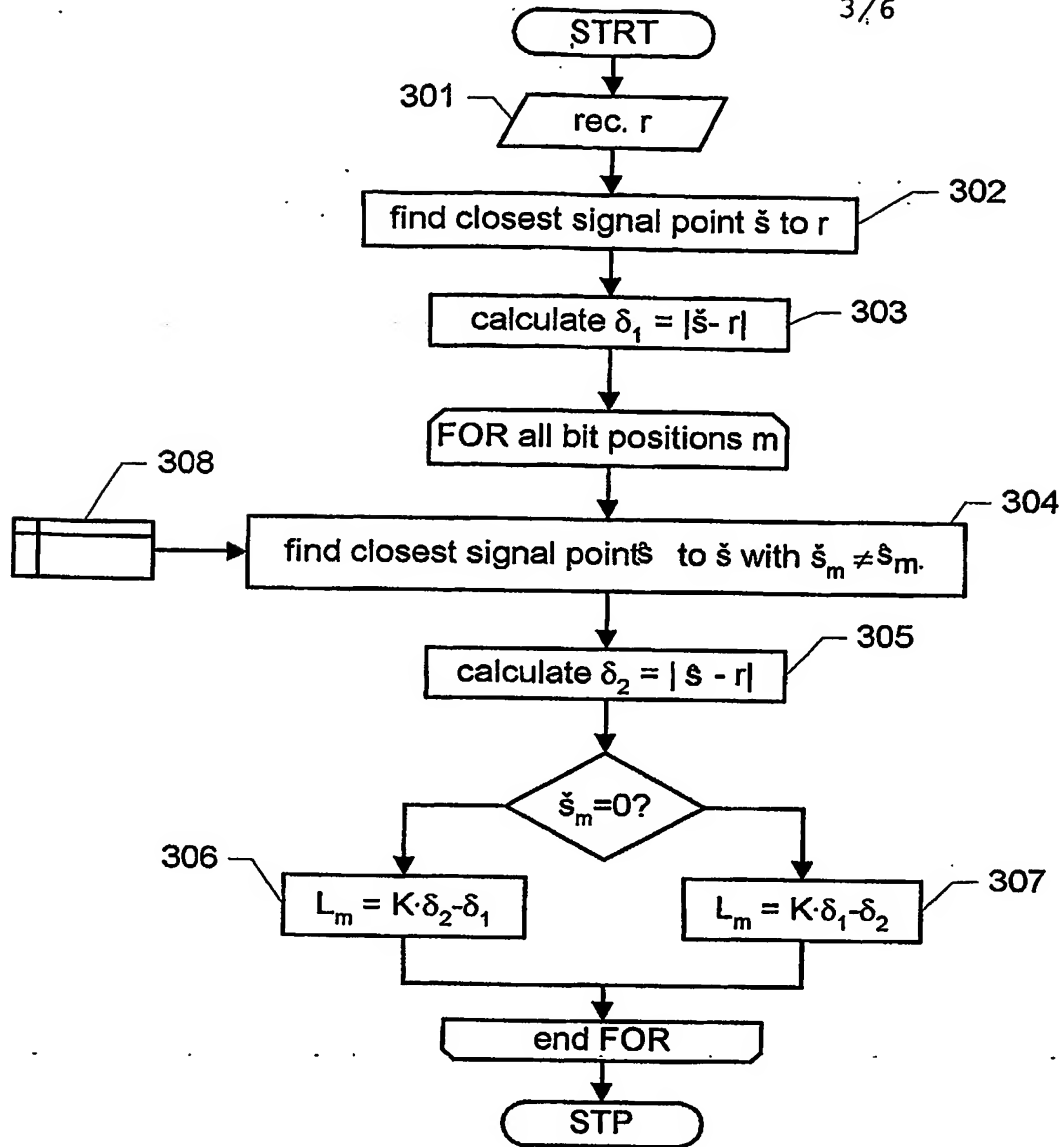


Fig. 3

402

	$m = 1$	$m = 2$...	$m = \log_2(M)$
$\hat{s} = S_1$	$\hat{s} = S_3$	$\hat{s} = S_9$...	$\hat{s} = S_5$
$\hat{s} = S_2$	$\hat{s} = S_3$	$\hat{s} = S_{10}$...	$\hat{s} = S_6$
M	M	M	O	M
$\hat{s} = S_M$	$\hat{s} = S_{14}$	$\hat{s} = S_8$...	$\hat{s} = S_{12}$

308

Fig. 4

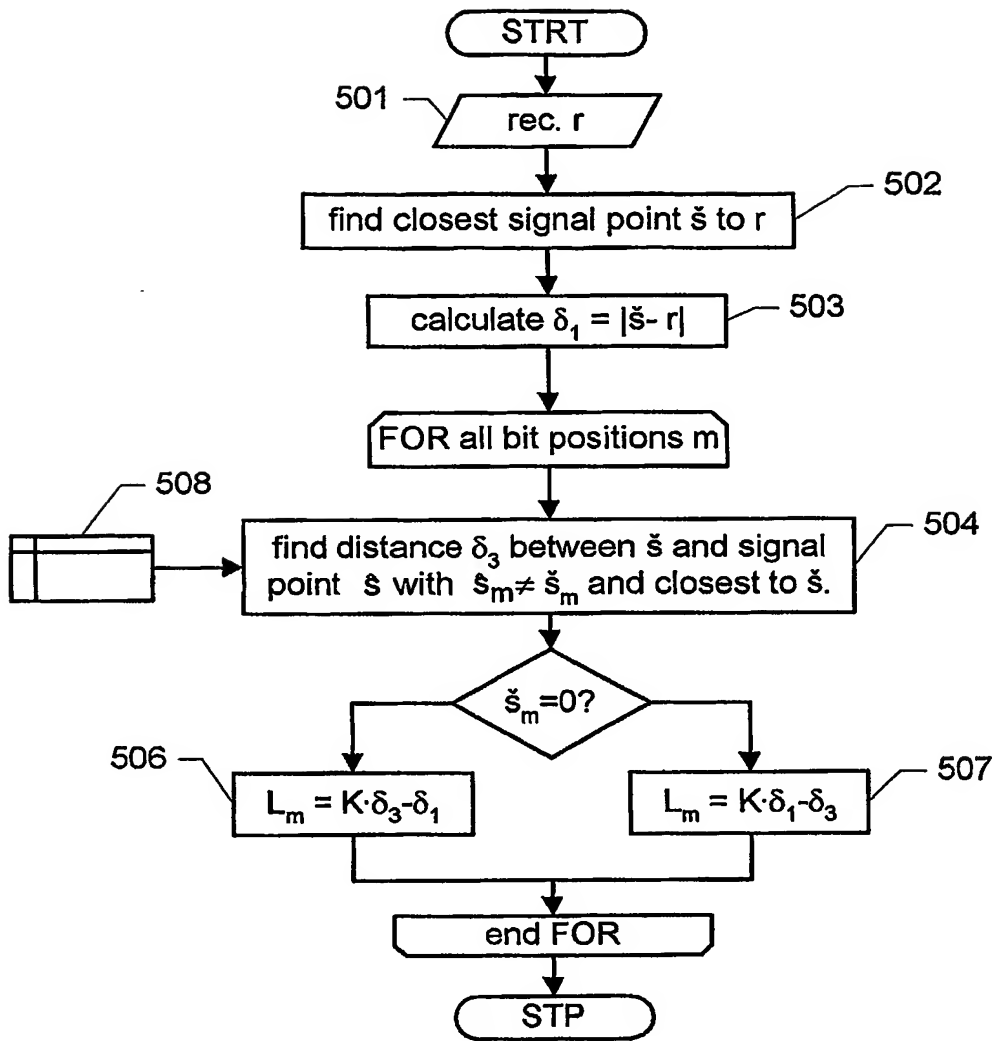


Fig. 5

	$m = 1$	$m = 2$...	$m = \log_2(M)$
S_1	$d_{1,1}$	$d_{1,2}$...	$d_{1,\log(M)}$
S_2	$d_{2,1}$	$d_{2,2}$...	$d_{2,\log(M)}$
M	M	M	O	M
S_M	$d_{M,1}$	$d_{M,2}$...	$d_{M,\log(M)}$

508

Fig. 6

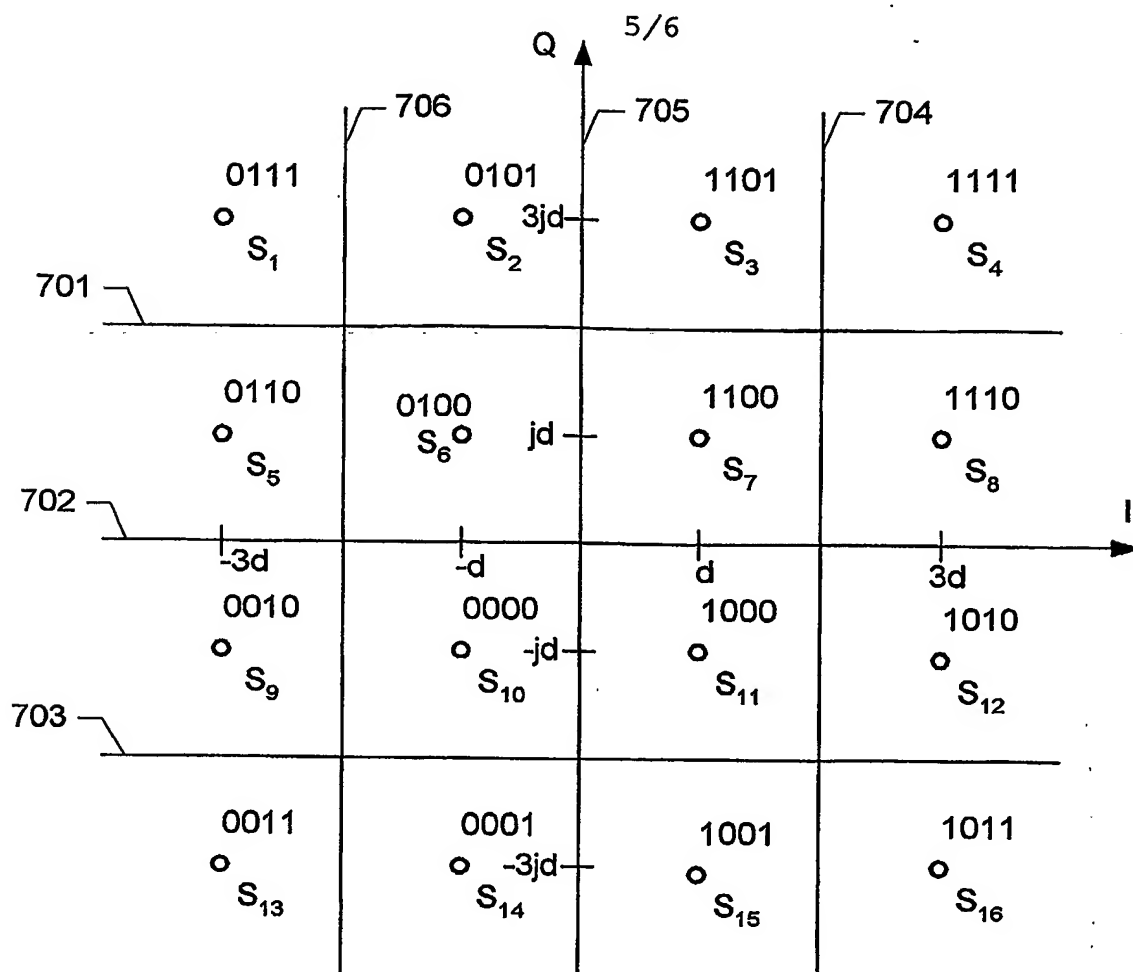


Fig. 7

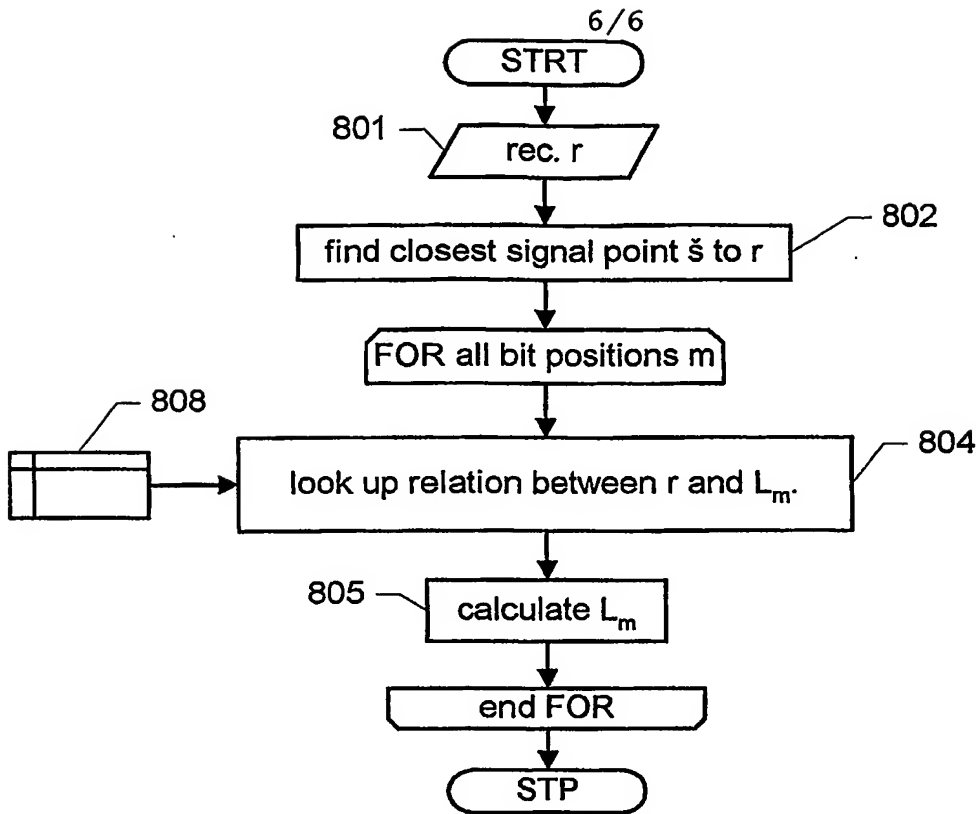


Fig. 8

Decision region	L_1	L_2	L_3	L_4
S_1	$4K \cdot (2ad - 2d^2)$	$4K \cdot (-2bd + 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_2	$4K \cdot (ad)$	$4K \cdot (-2bd + 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_3	$4K \cdot (-ad)$	$4K \cdot (-2bd + 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_4	$4K \cdot (-2ad + 2d^2)$	$4K \cdot (-2bd + 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_5	$4K \cdot (2ad - 2d^2)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_6	$4K \cdot (ad)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_7	$4K \cdot (-ad)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_8	$4K \cdot (-2ad + 2d^2)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_9	$4K \cdot (2ad - 2d^2)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{10}	$4K \cdot (ad)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{11}	$4K \cdot (-ad)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{12}	$4K \cdot (-2ad + 2d^2)$	$4K \cdot (-bd)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{13}	$4K \cdot (2ad - 2d^2)$	$4K \cdot (2bd - 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{14}	$4K \cdot (ad)$	$4K \cdot (2bd - 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{15}	$4K \cdot (-ad)$	$4K \cdot (2bd - 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$
S_{16}	$4K \cdot (-2ad + 2d^2)$	$4K \cdot (2bd - 2d^2)$	$4K \cdot (ad - 2d^2)$	$4K \cdot (bd - 2d^2)$

808

Fig. 9

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.